# 30” Rangetop
# Model: KMR 1124 G / KMR 1124 LP

**KMR 1124 G / KMR 1124 LP**
**Features:**

- Backlit precision knobs
- M Pro dual stacked burner system with TrueSimmer
- ComfortClean dishwasher-safe grates
- Clean Touch Steel™ front

| SPECIFICATIONS | |
|---|---|
| **KMR 1124 G —** Item 26112450USA | |
| **KMR 1124 LP —** Item 26112451USA | |
| Overall Unit Width | 29 15/16” (760mm) |
| Overall Height from the base of the appliance to the top, not including grates | 7 1/2” (191mm) |
| Overall Unit Depth to the front of control panel | 26 1/2” (673mm) |
| **Niché** | |
| Minimum Cabinet Width | 30” (762mm) |
| Minimum Cabinet Depth to back of control panel | 25 1/16” (636.6mm) |
| **Burners** | |
| Gas Burners: | (1) 12,500 BTU; (3) 19,500 BTU |
| Total BTU Output: | 71,000 BTU |
| Gas Line Connection | 1/2” NPT |
| **Electrical** | |
| Electrical Requirements | 120V, 60Hz, 15 Amps |
| Power Cord | Yes - NEMA 5-15 plug, 4ft (1.2m) long |
| **Shipping** | |
| Shipping Weight | 110.2 lbs. (50kg) |
| **Support** | |
| Call | 800.843.7231 |
| 20/20 | 2020technologies.com |

## PRODUCT VIEWS

Front View

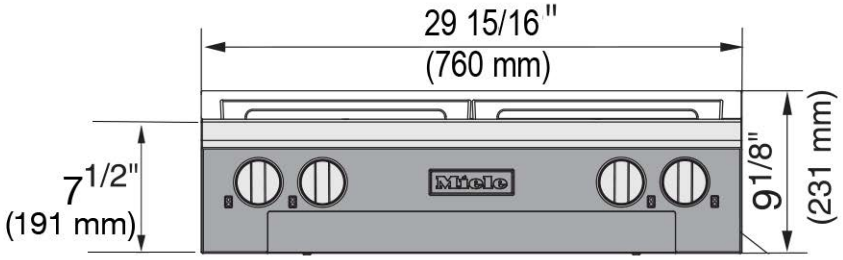


Side View

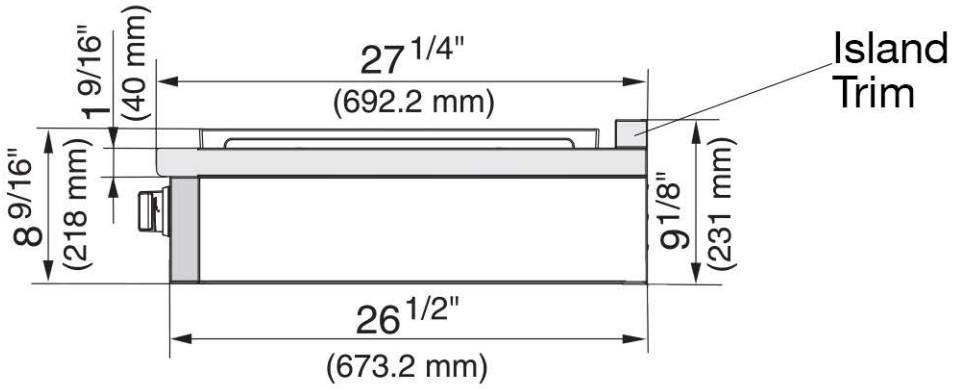


Rear View

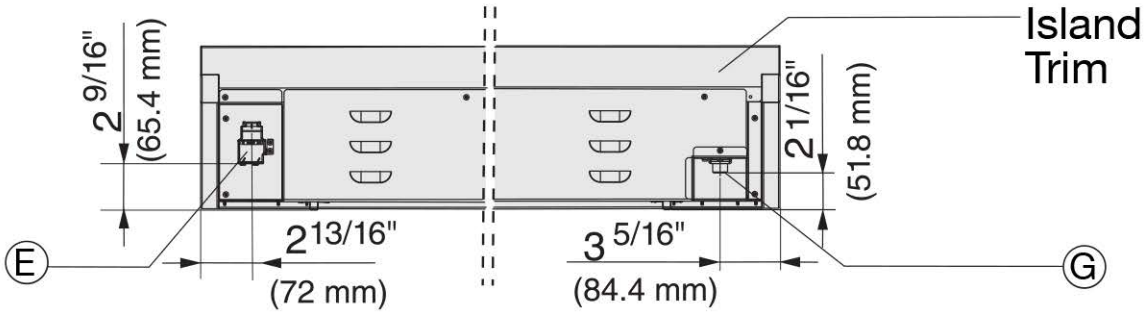


Length of power cord is 4 ft.(1.2m)

E = Electrical connection G = Gas connection

## PRODUCT VIEWS

Cabinet View

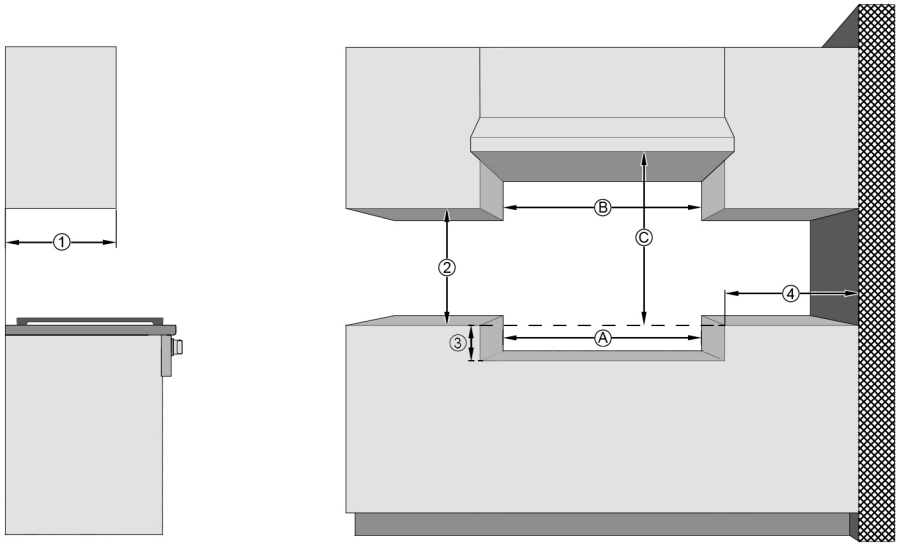


Ⓑ In case of combustible construction, an additional minimum clearance of 6" (each side) is necessary.

| Position | Dimension | Description |
|---|---|---|
| ① | 13" (330 mm) | Maximum depth of top cabinet |
| ② | 18" (457 mm) | Minimum distance to bottom edge of top cabinet |
| ③ | 7 1/2" (191 mm) | Distance top edge of worktop to top edge of platform |
| ④ | 10" (254 mm) | Minimum distance to combustible surfaces |
| Ⓐ | 30" (760 mm) | Width of cabinet opening |
| Ⓑ | 6“ + Ⓐ + 6" | In case of the presence of combustible material an additional minimum clearance of 6“ (each side) is necessary. Ensure local codes are observed. |
| Ⓒ | 37" (940 mm) | Minimum distance between the top of the cooking area and the bottom of an unprotected combustible surface. |
| | 30" (760 mm) | Minimum distance between the top of the cooking area and the bottom of the Miele Range Hood (DAR model with DRxB XL Blower). |
| | For all other Hoods, please consult with manufacturer's instructions for required distances. | |

For gas and electrical connections, see Rear Product View